

Technical Data Sheet

Hot Melt Adhesive

BAMFutura 1

Applications

BAMFutura 1 has been proven to be an excellent universal carton and case sealer. It performs well on the slowest case packers and the fastest carton sealers (160 cartons per minute-typical), in both cold winter and hot summer conditions. In storage, the case/carton will retain bond integrity at high ambient temperatures and low storage temperatures.

Special Features

- Low odour, non-fuming and non-tainting
- High molten tack and fast speed of set
- Excellent thermal stability, preventing nozzle blockages caused by the build up of char


Test	Test Methods	Typical Value
Colour	Visual	Water White
Form	N/A	Pastilles
Viscosity	BAQA101	1175cP @ 160°C
Softening Point	BAQA102	110°C
Adhesive Open Time	BS5350 (s)	Medium
Molten Tack	N/A	High

TDS/BAMFutura 1/ Issue 18/ 27/07/2020

Note: This publication is intended to serve as a guide only. Customers should satisfy themselves by appropriate trials that the products are suitable for their intended use. © 2015.™ The Beardow Adams logo, BAM, BAMFutura, BAMCare, BAMClean, AquaBAM, EcoBlock, Pressen and Prodas are all trademarks of Beardow & Adams (Adhesives) Limited.

Application method

BAMFutura 1 should be applied at 150°C to 180°C, depending upon the application, equipment and substrates to be bonded.

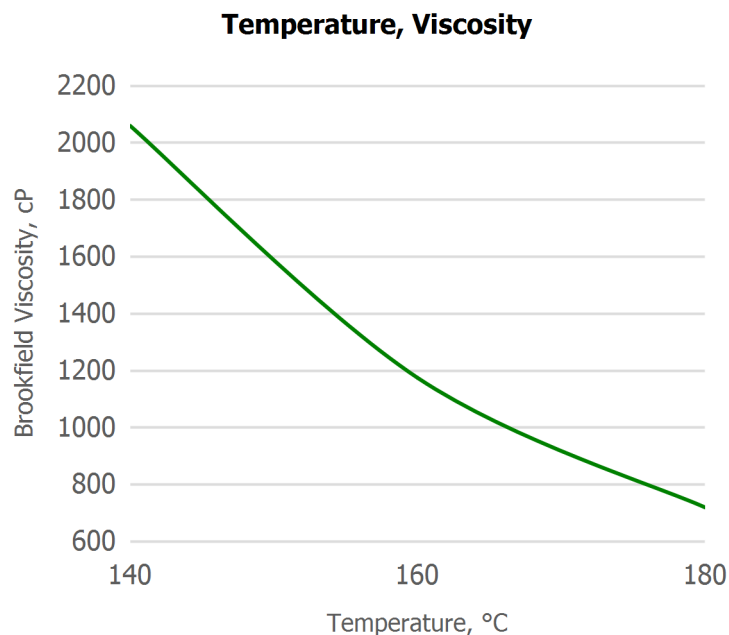

FDA

All the constituent parts of this adhesive have been approved by the American FDA under the following Section: CFR 21.175.105 (Adhesives)

Health and safety

Use protective clothing and take normal precautions when using hot liquids

Burns Do not attempt to remove cold adhesive from skin - seek medical advice.

Hot Fumes Do not inhale. Use in a well ventilated area.

Fire Risk Use at recommended running temperatures.

Thermal stability

All Beardow Adams hot melt adhesives are formulated to minimise the risk of degradation at elevated temperatures. However to ensure clean running keep to the suggested application temperature, check thermostats regularly and never exceed 200° C.

Storage

Store in a clean dry place at temperatures between 5 and 30°C with containers kept closed. Use oldest stock first.

Further advice

Highly experienced members of Beardow Adams' technical department are always available to help solve your adhesive problems and to give general advice. If you require further technical details on this hot melt adhesive or any other product from our range. Please contact our laboratory.

To arrange samples and trial quantities, please phone our sales department. Both departments can be contacted on 01908 574000 or faxed on 01908 574060.

Please note

The statements made in this data sheet are the experience of Beardow Adams in the field and the result of very careful laboratory evaluations by trained and qualified staff employing British Standard and similar test methods. No guarantee can be made, however, as regards specific applications as conditions and substrates etc are different for each individual case. Full production trials and end-use testing should be undertaken to properly evaluate any adhesive under specific conditions.